

Telco Room HVAC Upgrade

Bloomington, MN
HVAC Upgrade



Project Summary

XEC recently completed a Mechanical Upgrade and Expansion at a Mobile Switch Center in Bloomington, MN. This project consisted of constructing a new masonry addition to the existing facility to allow additional cooling to be provided. New Liebert CRAC units were installed on the interior of the addition to provide cooling to the existing Telco Room. The existing mechanical units and ductwork were removed while new mechanical equipment and ductwork were installed in the operating Telco Room. Fire detection and FM-200 suppression were installed in the addition as well.



Concrete Forms Started




Cad Weld at Lightning Rod



Masonry Installation



Brick Completed

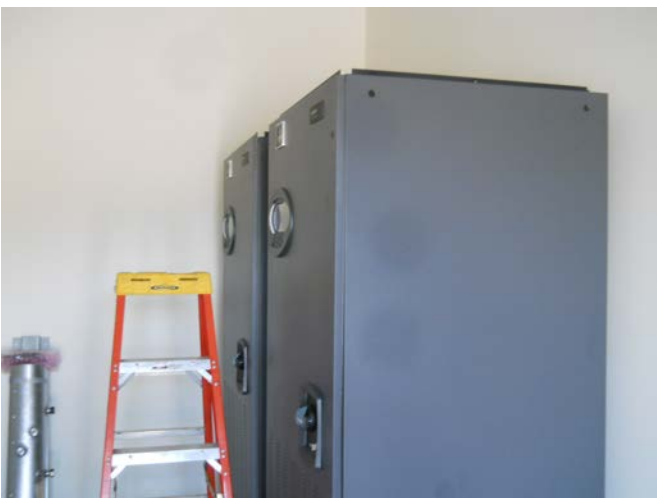

New Liebert CRAC Units Installed



Outside Condensing Units